FIG.1

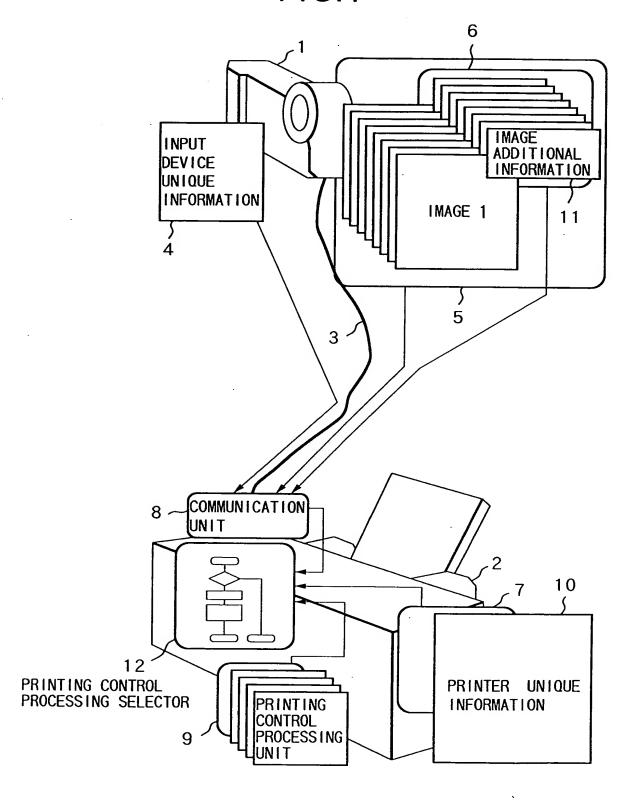


FIG.2

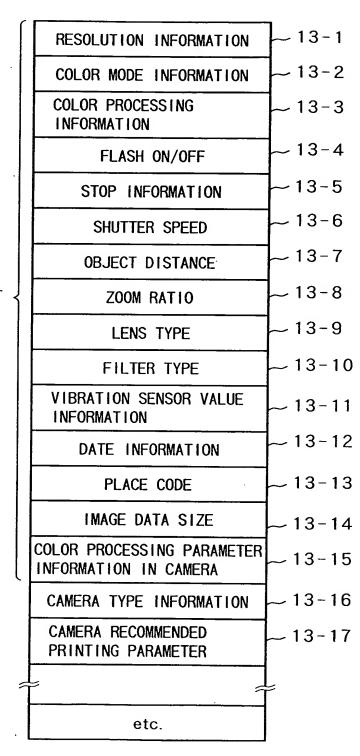


IMAGE ADDITIONAL INFORMATION

FIG.3

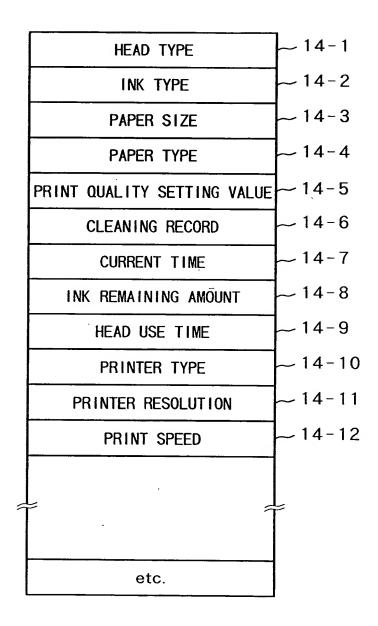


FIG.4

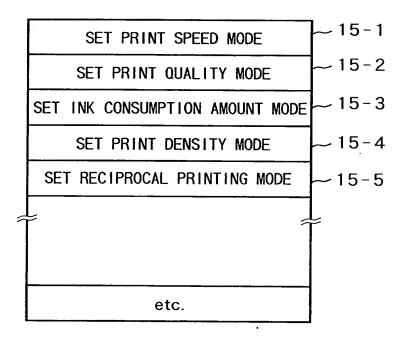
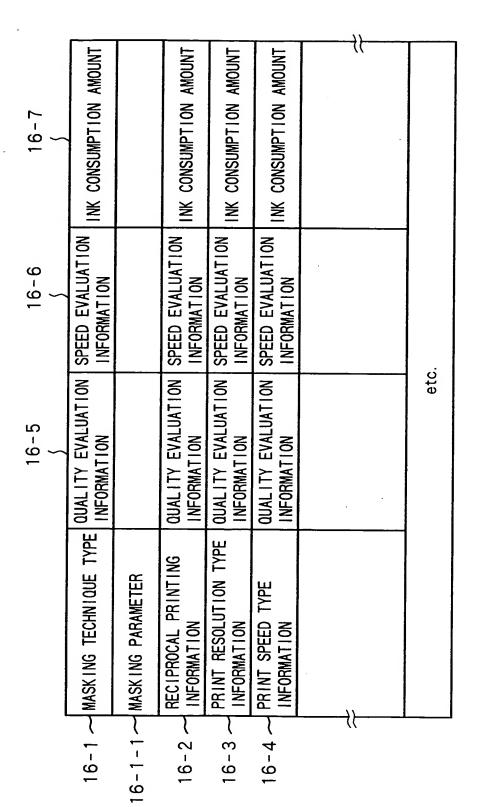


FIG.5



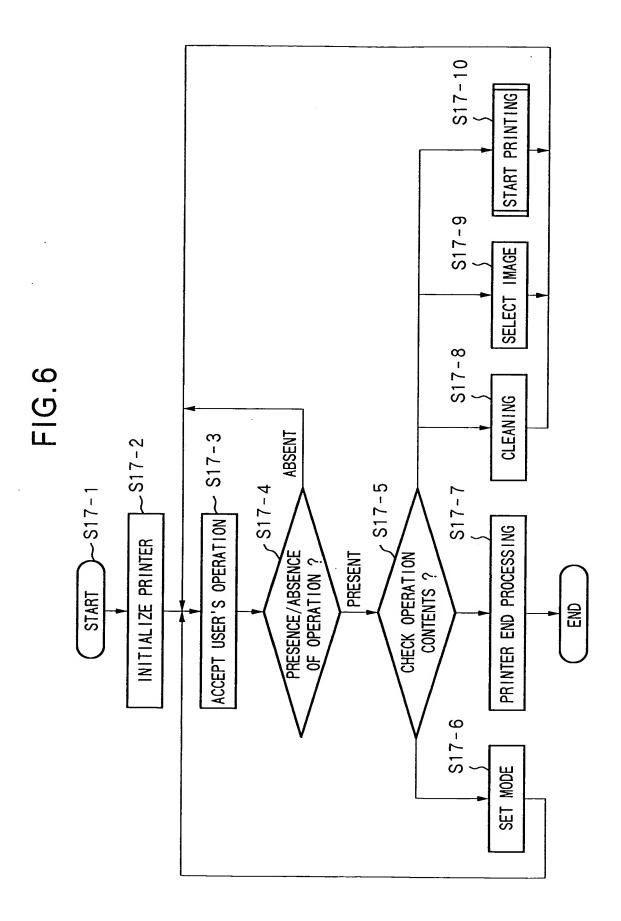
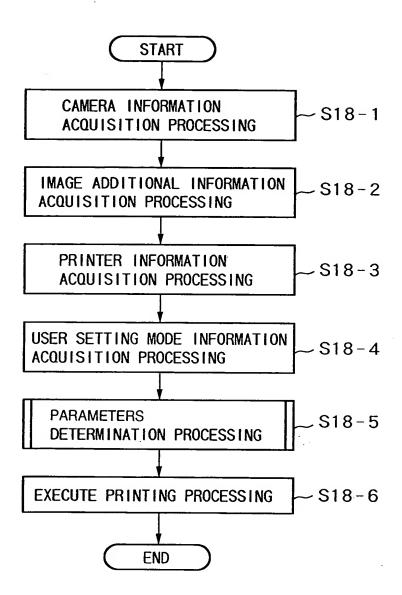
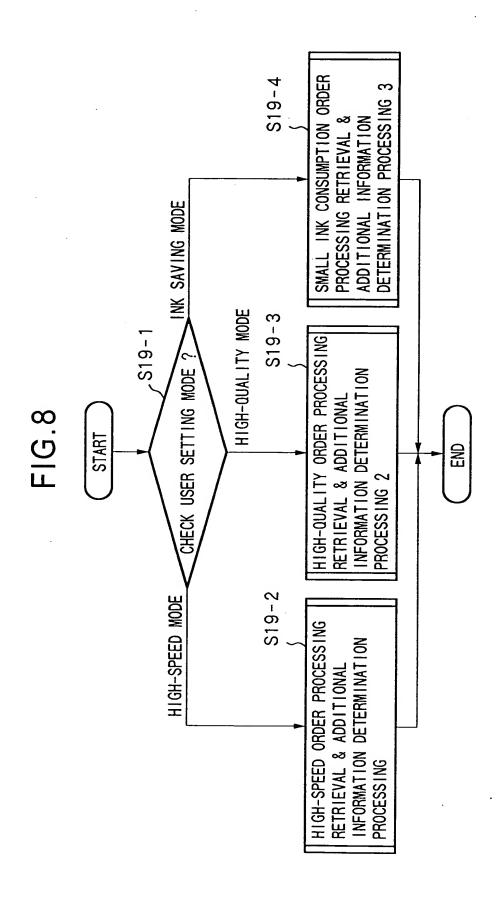


FIG.7





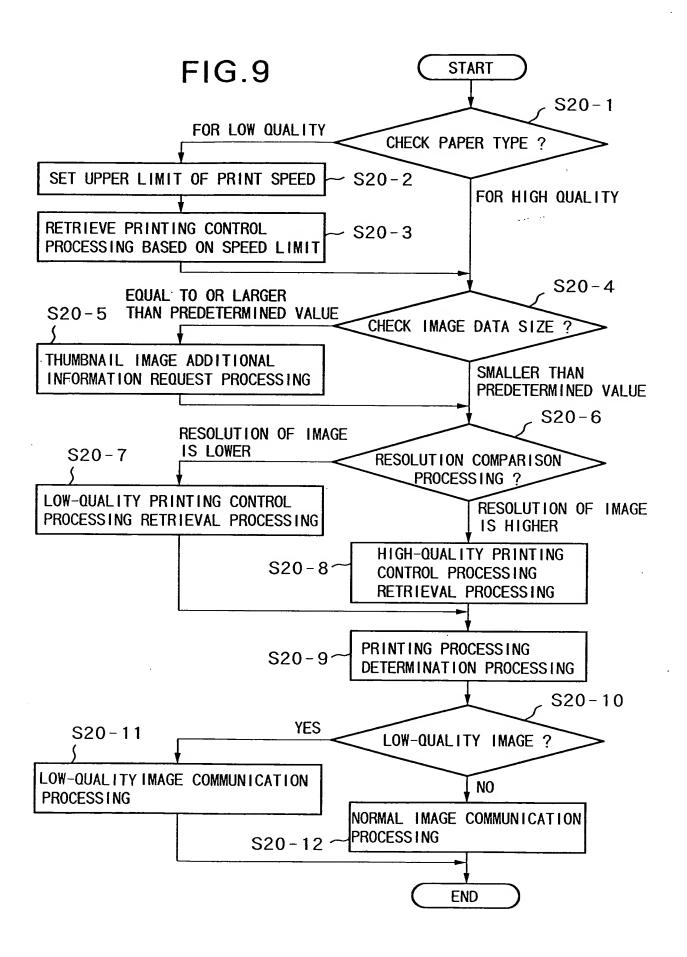


FIG.10

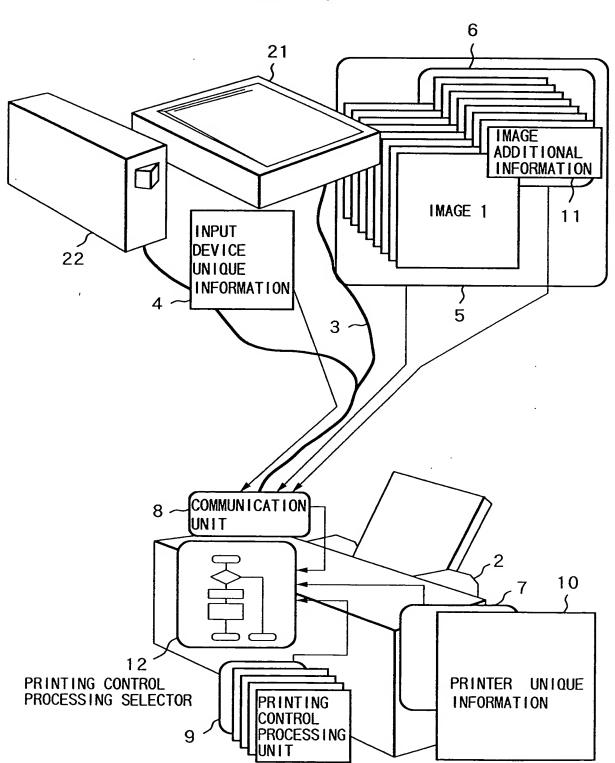
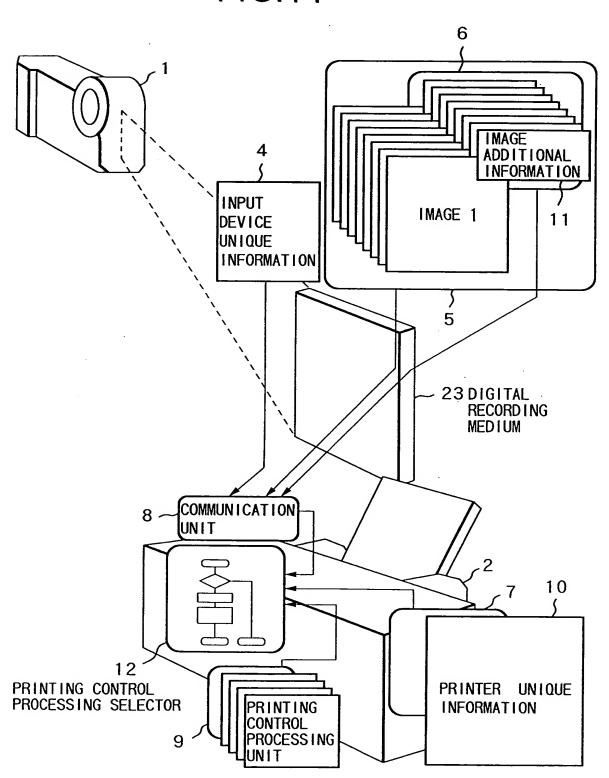
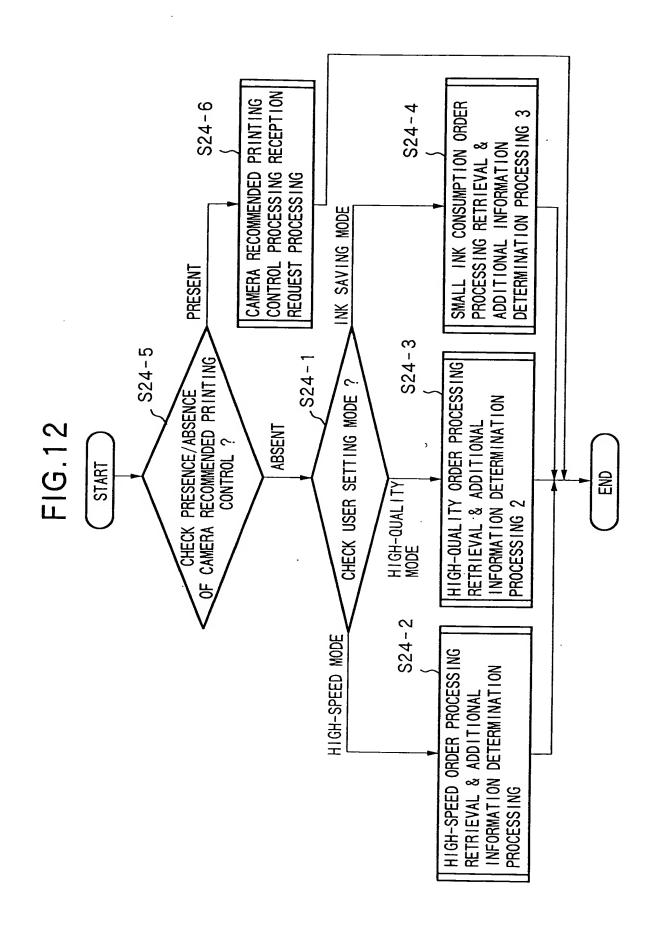


FIG.11





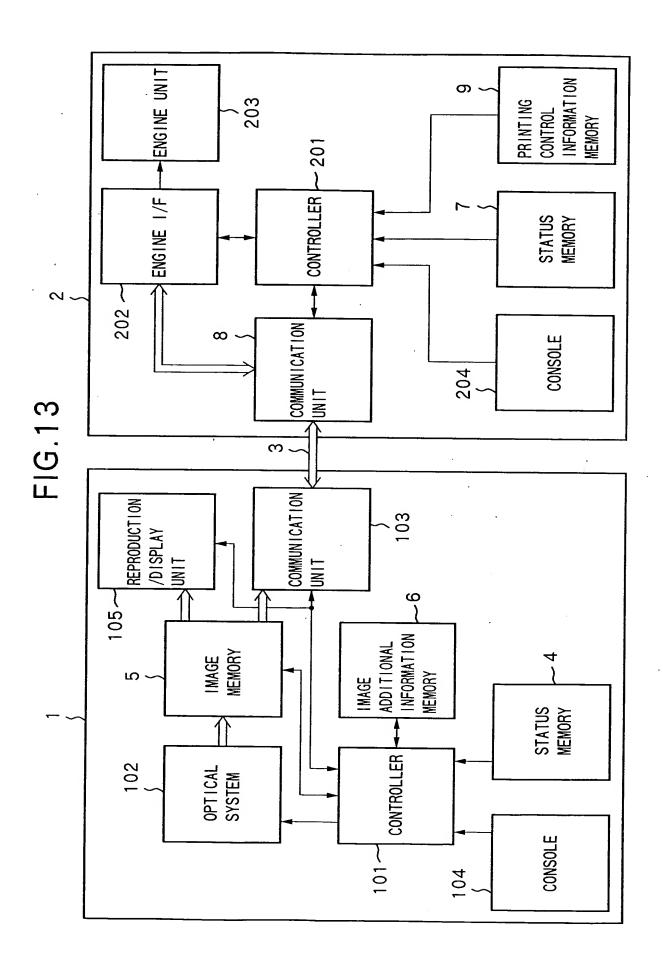


FIG.14

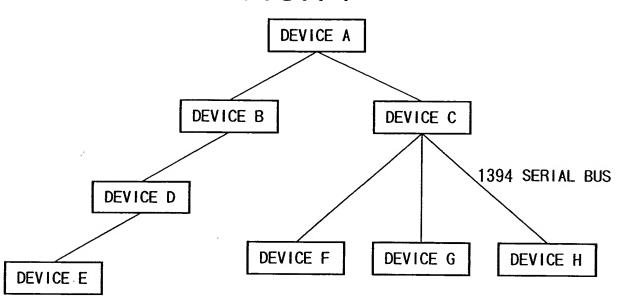
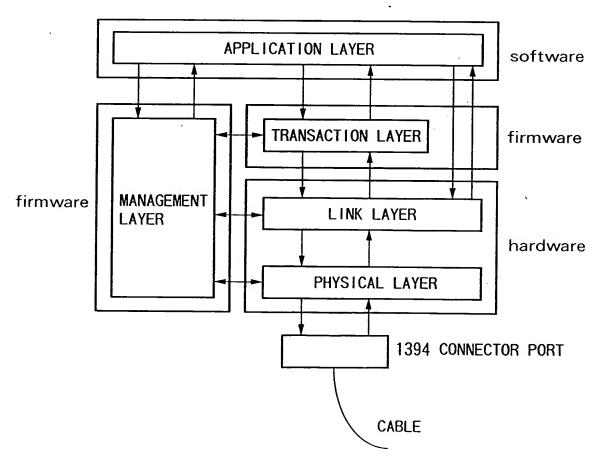


FIG.15



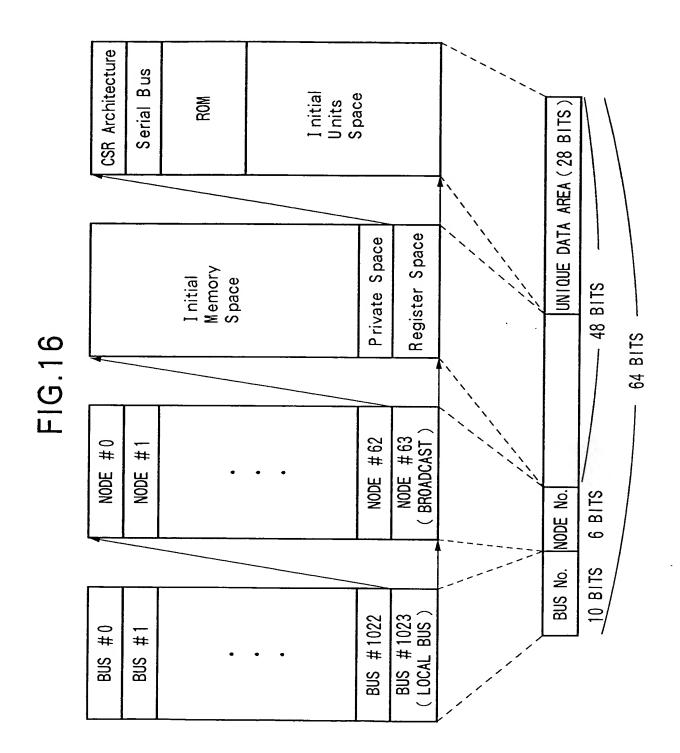


FIG.17



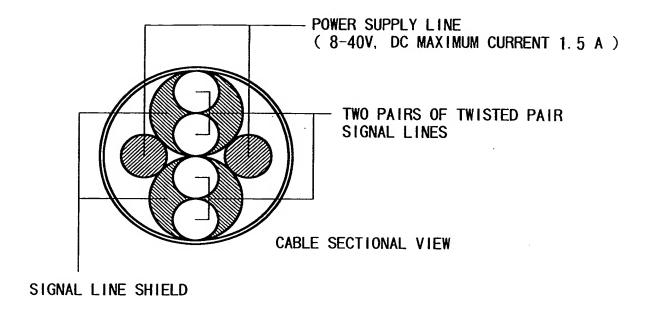


FIG.18

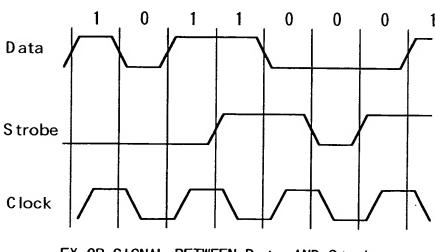

EX-OR SIGNAL BETWEEN Data AND Strobe

FIG.19

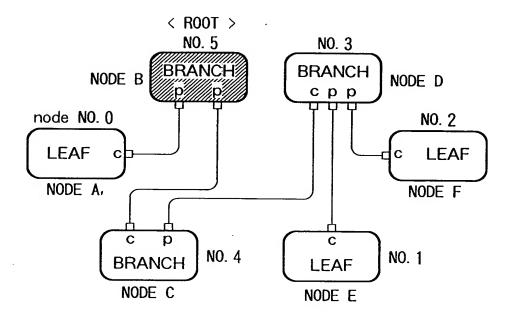

BRANCH: NODE HAVING TWO OR MORE NODE CONNECTIONS

LEAF: NODE HAVING ONLY ONE NODE CONNECTION

: PORT

c: PORT CORRESPONDING TO CHILD NODE p: PORT CORRESPONDING TO PARENT NODE

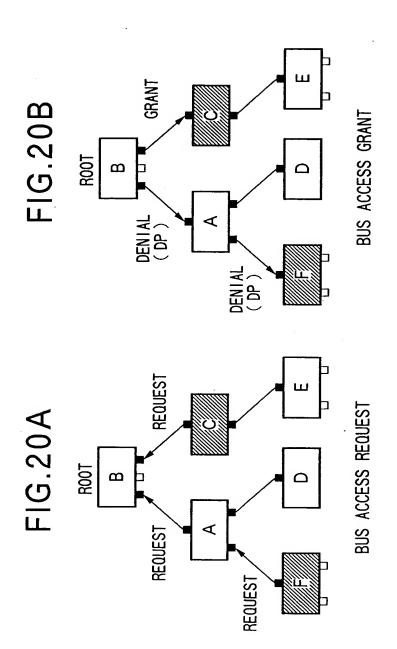


FIG.21



Time

packet type specific information 2bit 6bit = 32bit FIG.22 TARGET NODE ID SOURCE NODE ID DATA LENGTH 16bit

4bit

priority tCode | extended tcode 4bit DATA FIELD ($4 \times N$ BYTES) HEADER CRC DATA CRC TOTAL OF. 24 + 4 × N BYTES

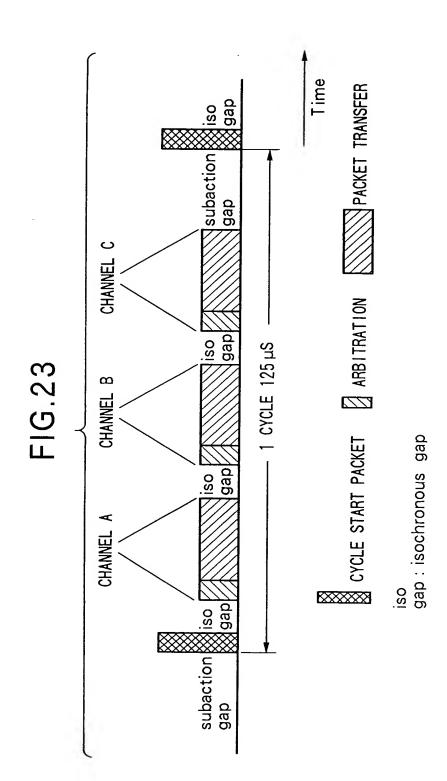
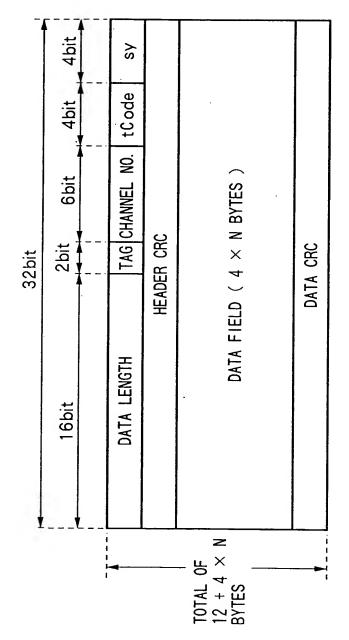


FIG.24



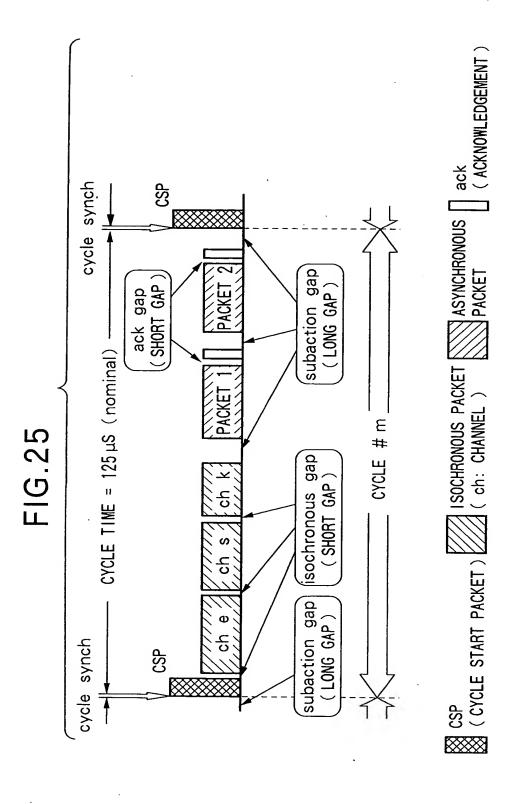


FIG.26

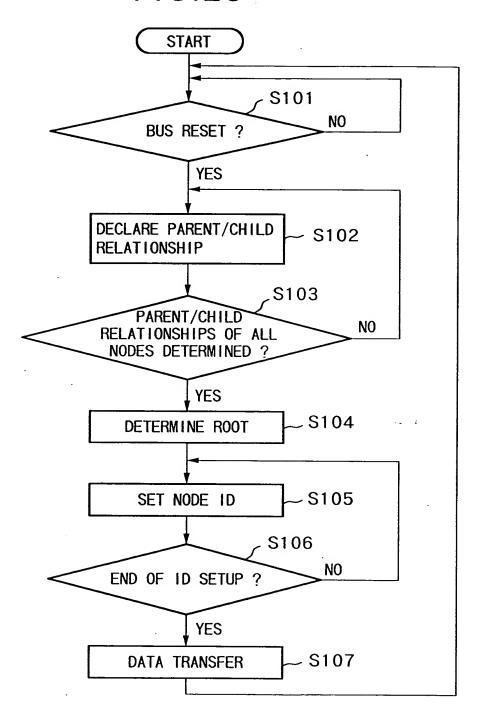
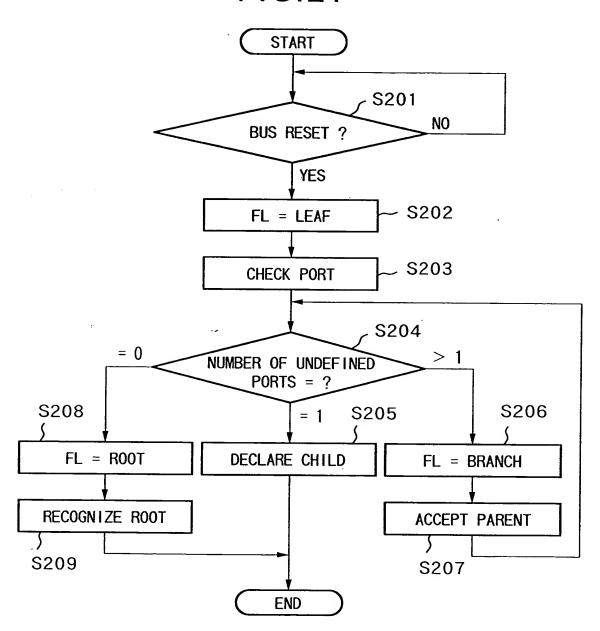


FIG.27



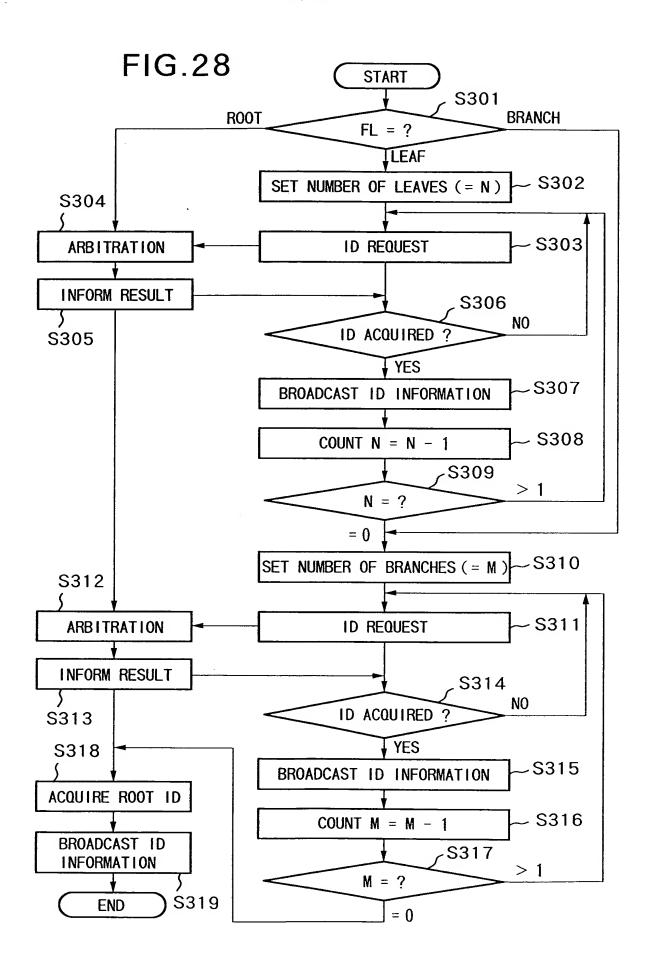


FIG.29

